



## Use of ground-based and nacelle-mounted lidars for power curve measurement

Wagner, Rozenn

*Publication date:*  
2013

[Link back to DTU Orbit](#)

*Citation (APA):*

Wagner, R. (Author). (2013). Use of ground-based and nacelle-mounted lidars for power curve measurement. Sound/Visual production (digital)

---

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal


If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

# Use of ground-based and nacelle-mounted lidars for power curve measurement

Rozenn Wagner

rozn@dtu.dk

Danish Wind Power Research 2013  
27/05/2013  
Fredericia

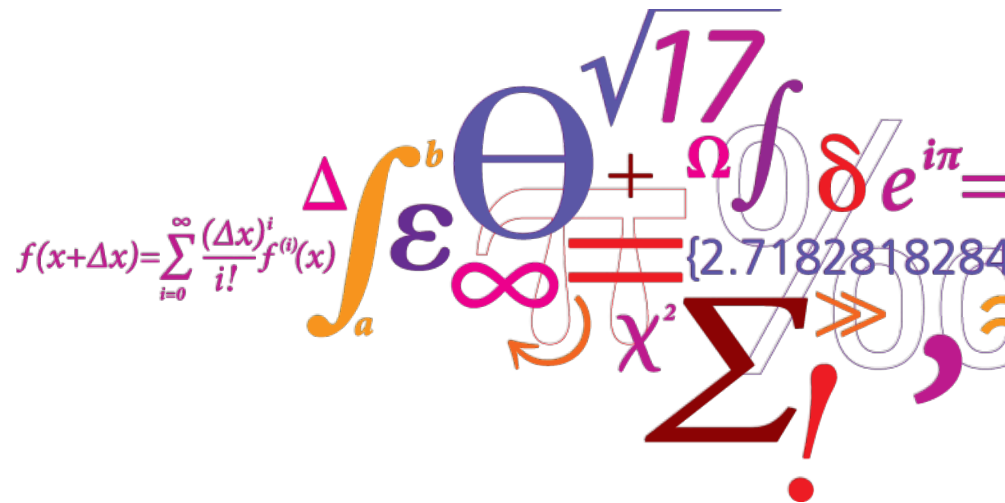

# Two ways of using a lidar for power curve measurement

---


## 1. Ground based lidar




## 2. Nacelle based lidar



# How is a power curve measured?



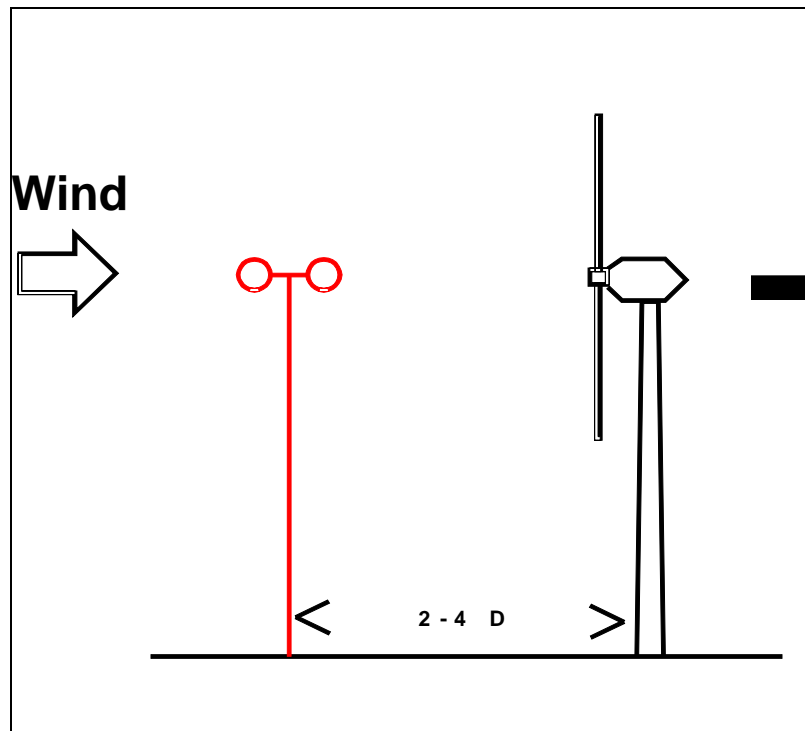


IEC standard 61400-12-1 Ed.1


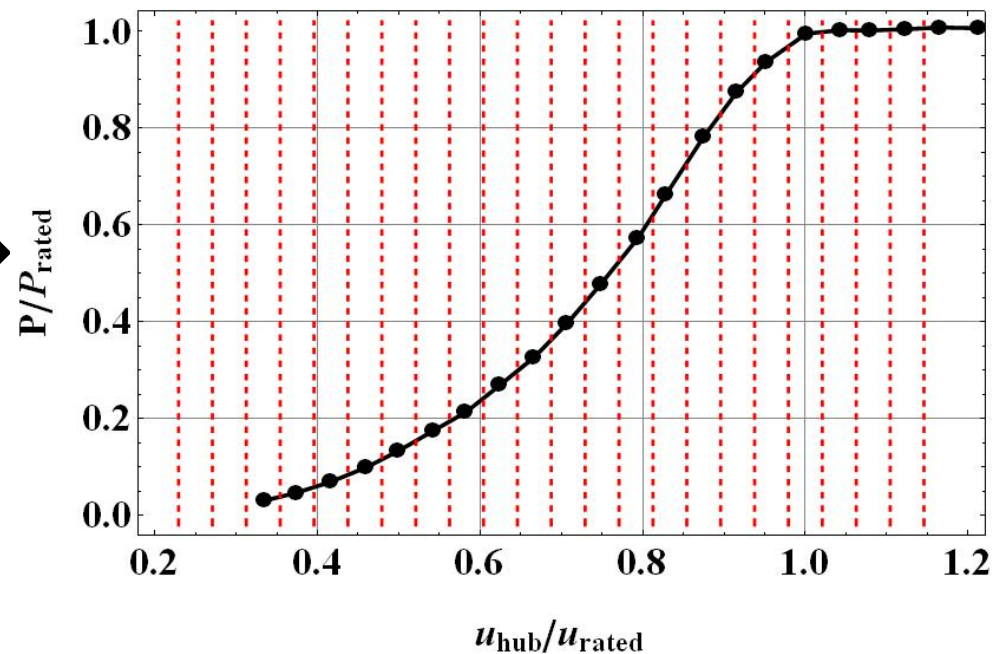


But the power curve does not only depend on the hub height wind speed;  
but also on the whole wind speed profile.

# Measurement setup

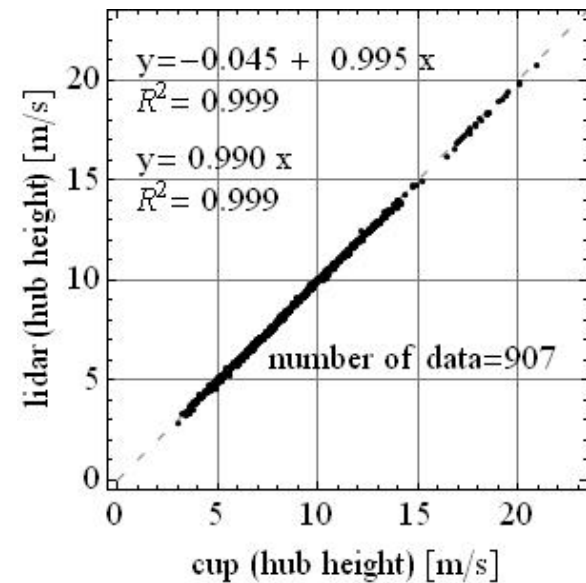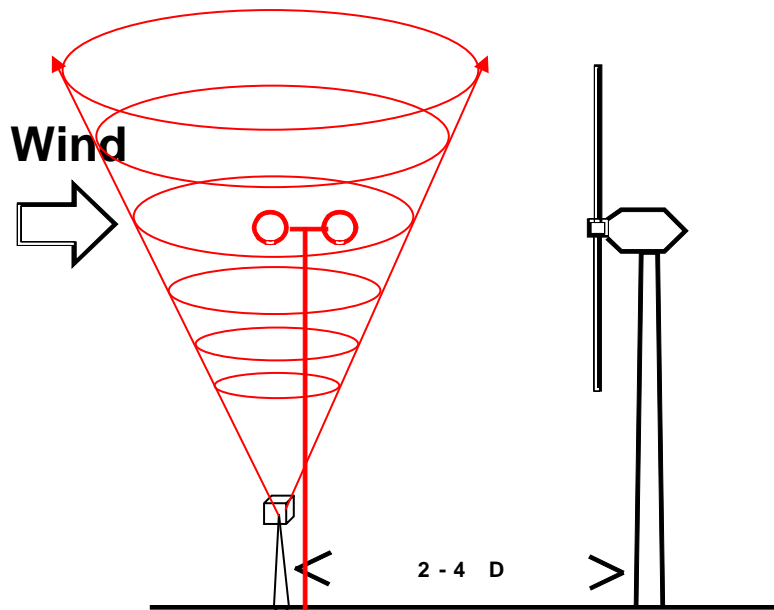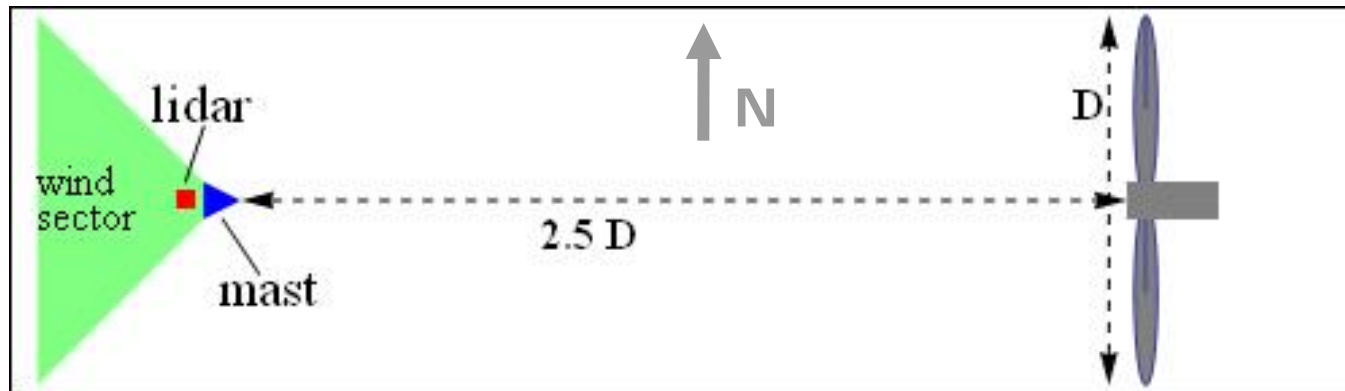

# Profiles classification

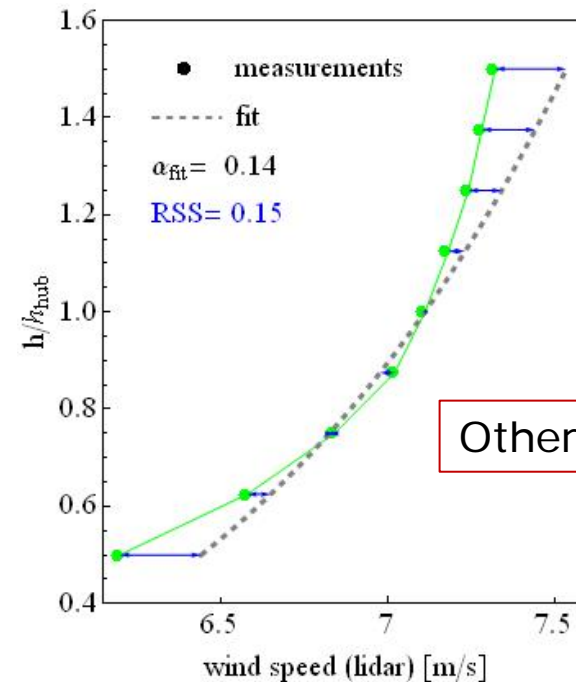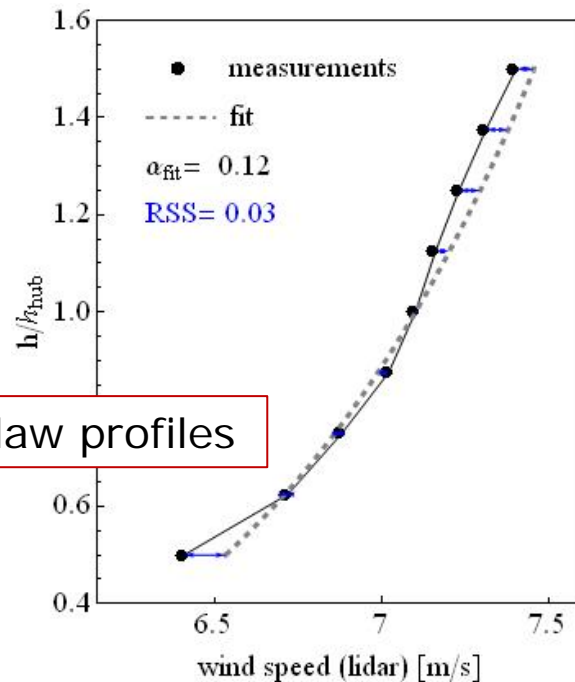

$$u_{fit}(z) = u_{hub}^m \left( \frac{z}{z_{hub}} \right)^{\alpha_{fit}}$$


$$RSS = \sum_i \left( u_{fit}(z_i) - u_i^m \right)^2$$

RSS < 0.1

RSS > 0.1

Categorisation of profiles  
for demonstration of  
shear effect

# Standard power curve

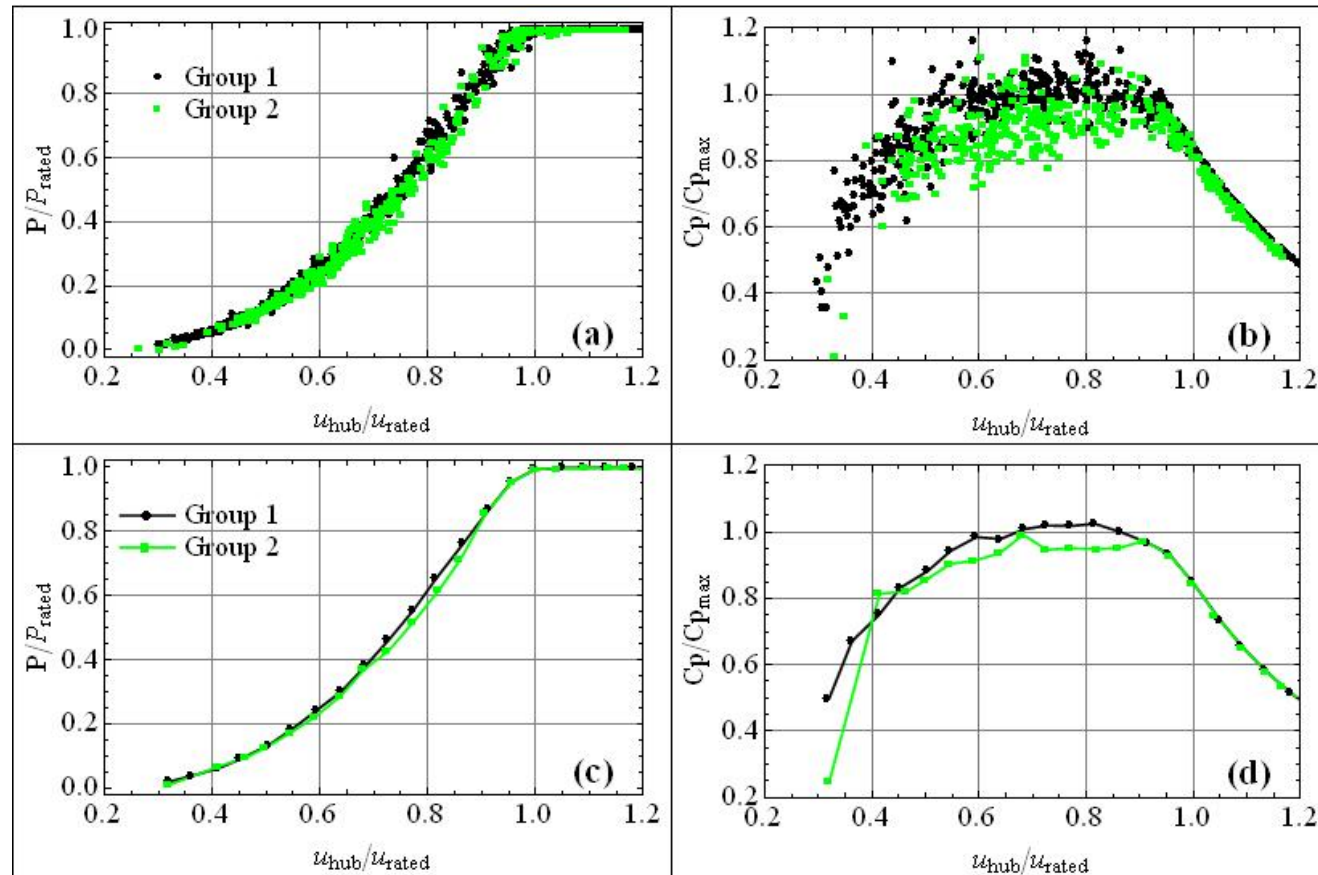


Two groups of profiles result in 2 different power curves.

# Rotor equivalent wind speed (REWS)


## Concept:

*One wind speed representative of the whole wind speed profile in front of the wind turbine rotor in term of power production*

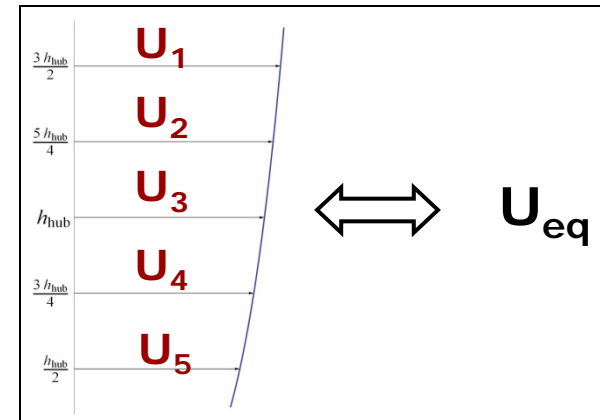


## Definition:

$$U_{KE} = \left( \frac{1}{A} \int_{-R}^R u(z)^3 c(z) dz \right)^{1/3} \approx \left( \sum_{i=1}^N u_i^3 \frac{A_i}{A} \right)^{1/3}$$

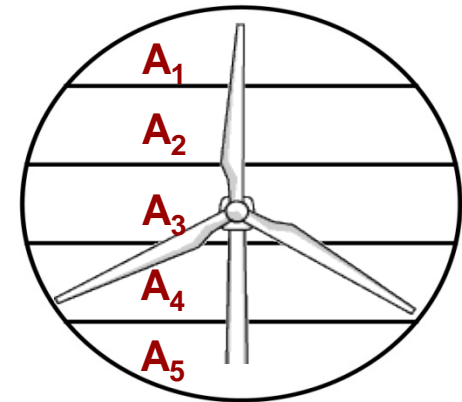



# Power curve with REWS

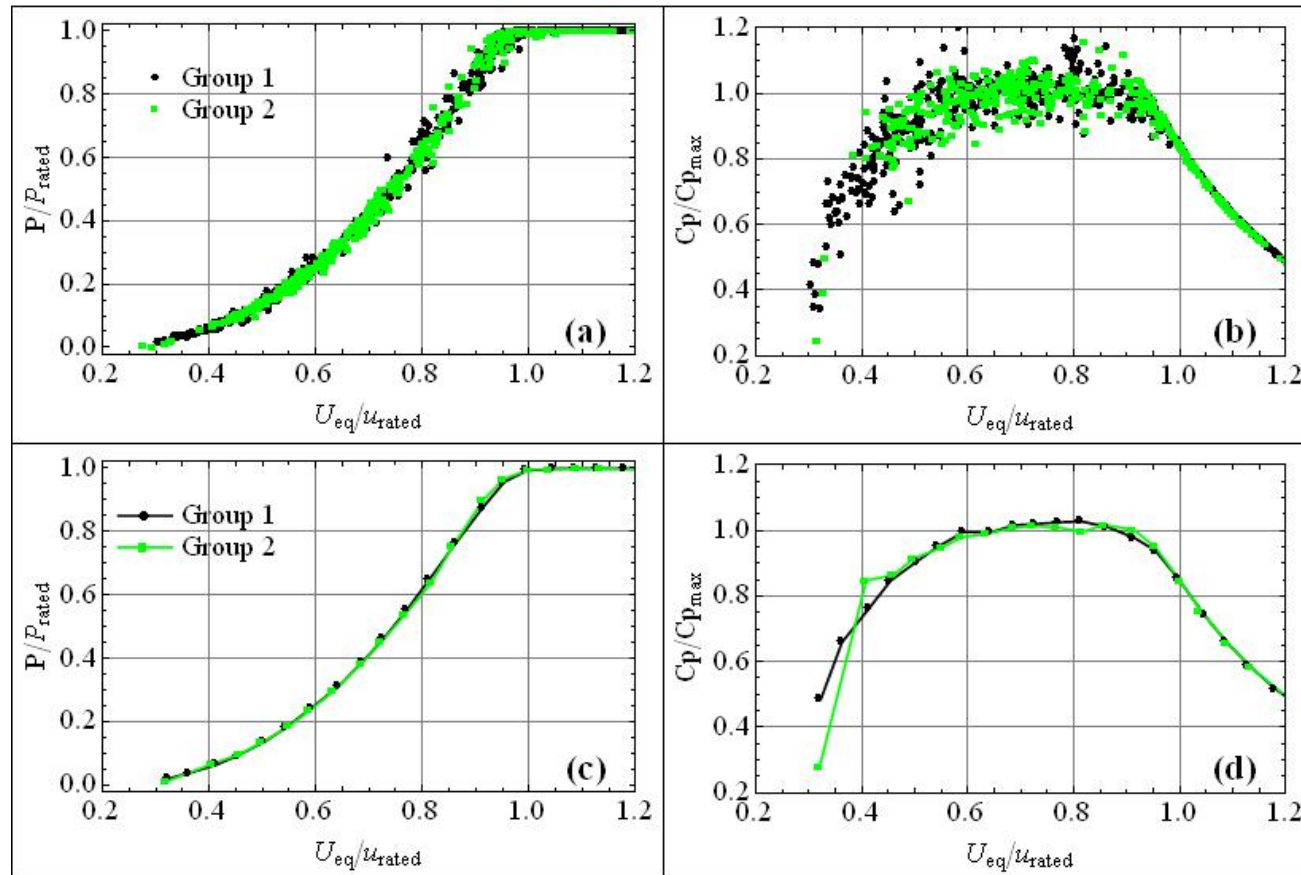

ertainty

ent of

requires  
ed  
ssment)

→ Similar power curves are obtained for both groups of profiles

# IEC 61400-12-1 Ed.2 CDV

---

Status: CDV to be released soon

- 1) Shear measurement must be included
    - either add uncertainty for the unknown shear
    - or use the rotor equivalent wind speed
- With wind speed measurements at minimum 3 different heights including one height above hub height.

## IEC 61400-12-1 Ed.2 CDV

---

Status: CDV to be released soon

- 1) Shear measurement must be included
  - either add uncertainty for the unknown shear
  - or use the rotor equivalent wind speed

With wind speed measurements at minimum 3 different heights including one height above hub height.
- 2) Allows the use of lidars/sodars to measure the wind speed profile, in flat terrain.
  - the lidar/sodar must be calibrated prior to power curve measurement campaign (to assess uncertainties)
  - used with a control mast during the power curve measurement

## Summary ground based lidars

---

Ground based lidars can provide accurate **wind speed profile measurements** all the way to the tip height:

- Lower scatter → lower uncertainty
- More repeatable power curve → better AEP estimation

**IEC 61400-12-1 Ed.2** will allow:

- Rotor equivalent wind speed power curve
- The use of lidars/sodars for power curve measurement

**IEA Task 32** about lidars (2012-2015)

Aim at recommended practices for the use of lidars in various applications

- WP 3.1 Exchange about experience about power curve measurement according to IEC 61400-12-1 Ed.2
- WP 2.4 Use of lidars (wind profiles) for resource assessment

## Nacelle mounted lidar

---



EUDP Project:  
"Nacelle lidar for power  
performance measurement"  
2010-2012


### Project partners:

DTU  
DONG Energy  
Avent Lidar  
Siemens Wind power

DTU Wind Energy, Technical University of Denmark




## How does it work?

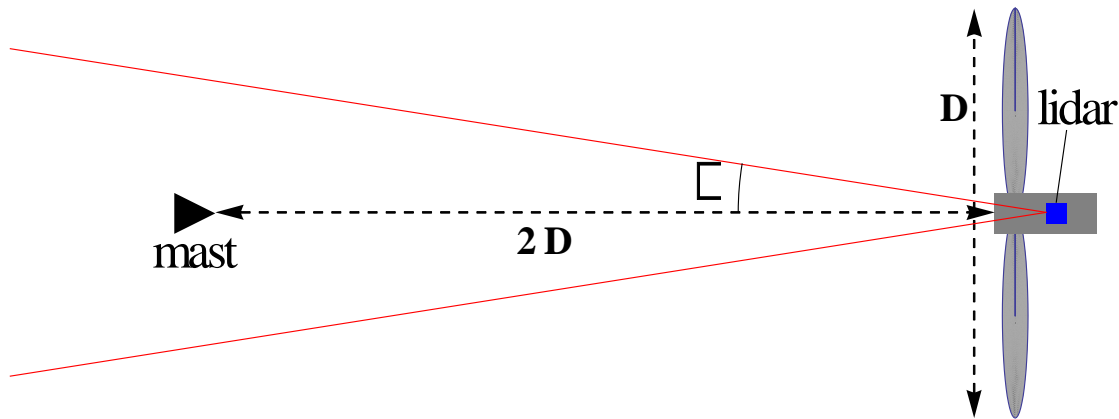

- 2 lines of sight
- Half opening angles:  $15^\circ$
- Measures radial speeds and reconstructs horizontal wind speed vector
- Assumes vertical component to be null
- Assumes horizontal homogeneity!



# Measurement height uncertainty

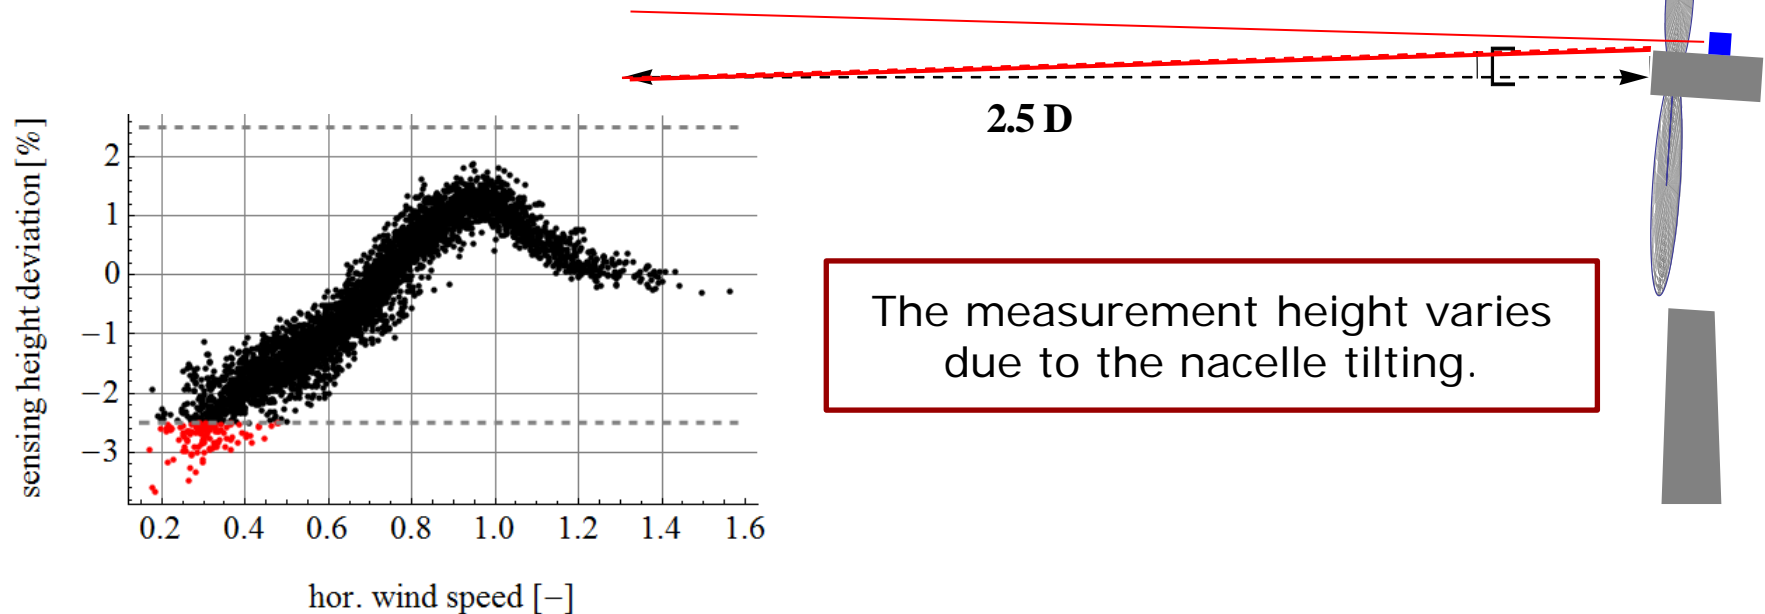

1. Lidar pre-tilted to account for:
  - the actual height of the lidar optical head above hub height
  - the backward tilt of the turbine whilst in operation
2. Extra uncertainty must be added to the wind speed bins for which the measurements took place outside the range hub height  $\pm 2.5\%$ .

# Lidar calibration


Individual calibrations of the two line-of-sight (radial) wind speeds

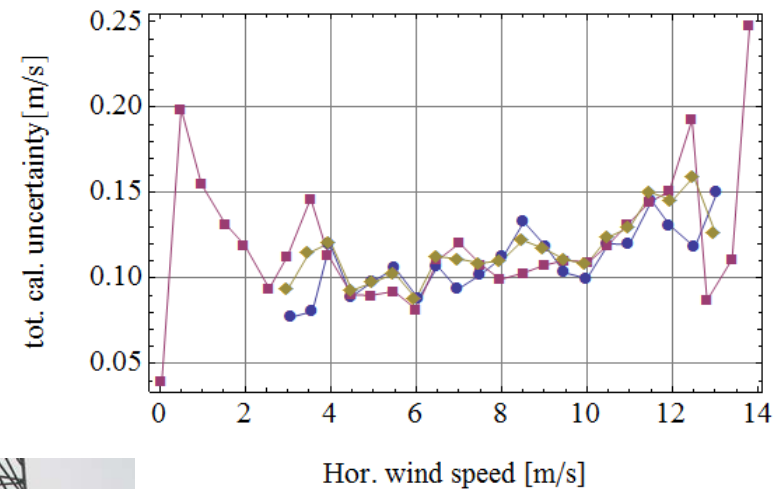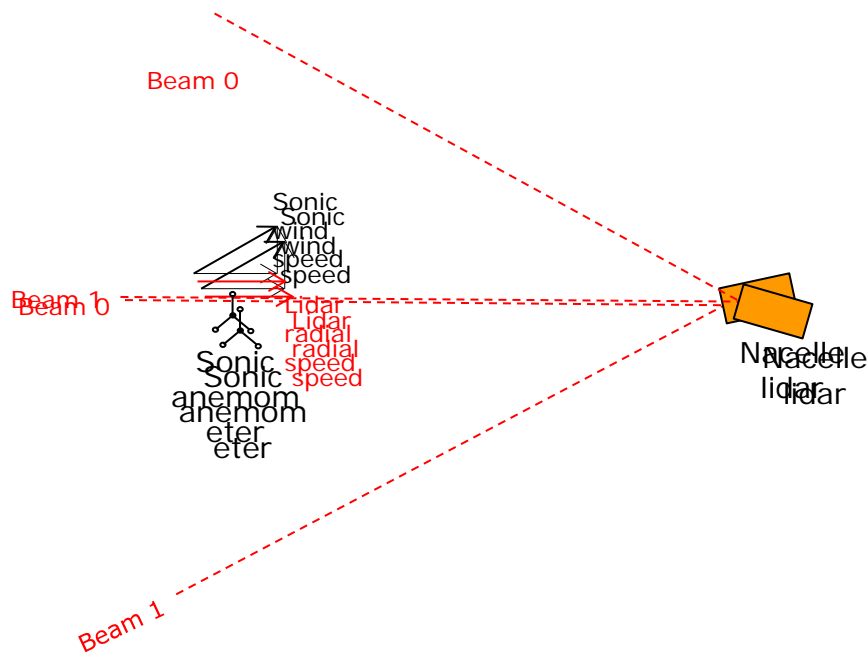

The lidar should be calibrated for traceability and uncertainty estimation.




# Ten minute mean horizontal wind speed

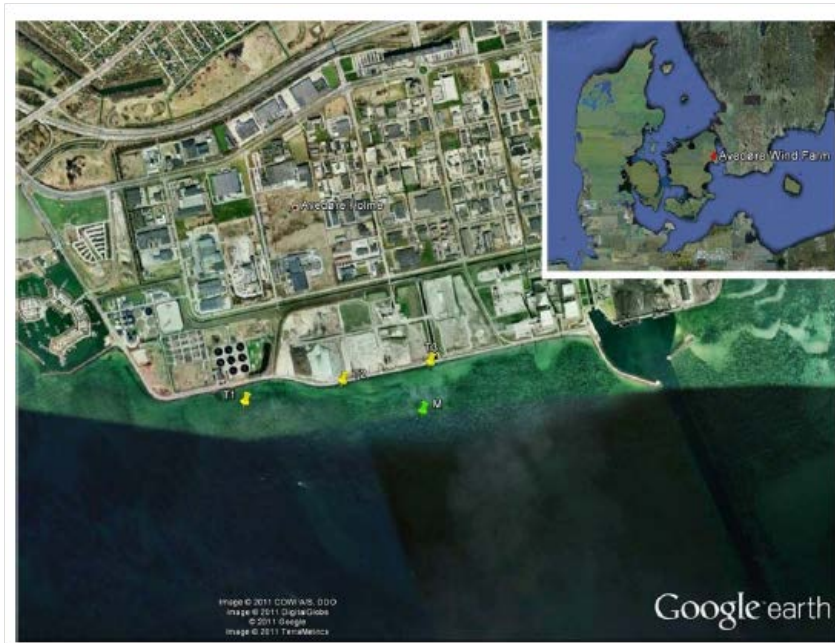


DONG Energy power station,  
Avedøre, South West of Copenhagen

Comparison of lidar and cup  
anemometer 10-minute data

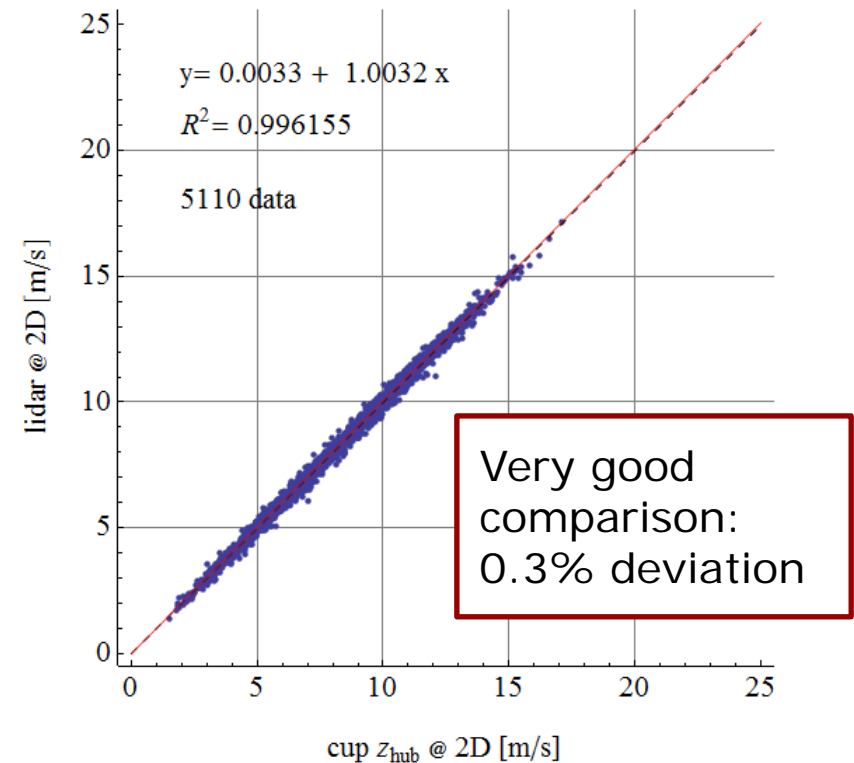


# Comparison of the power curves at 2D

Bin-averaged power curves

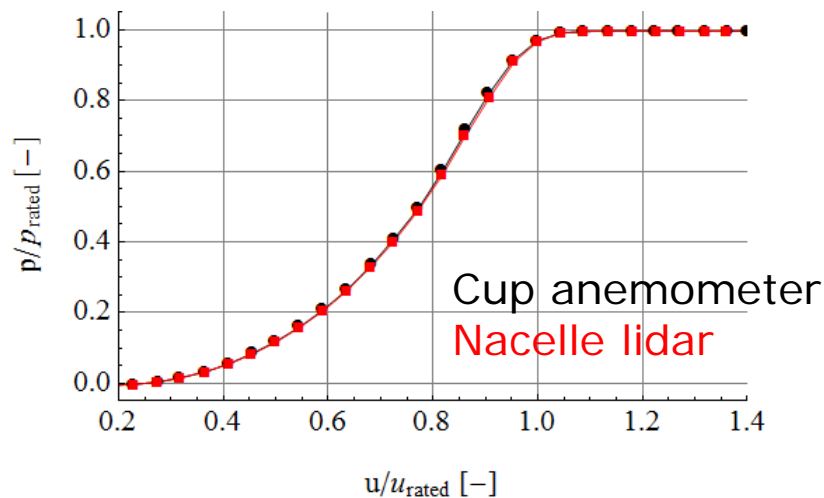

Power curve uncertainty

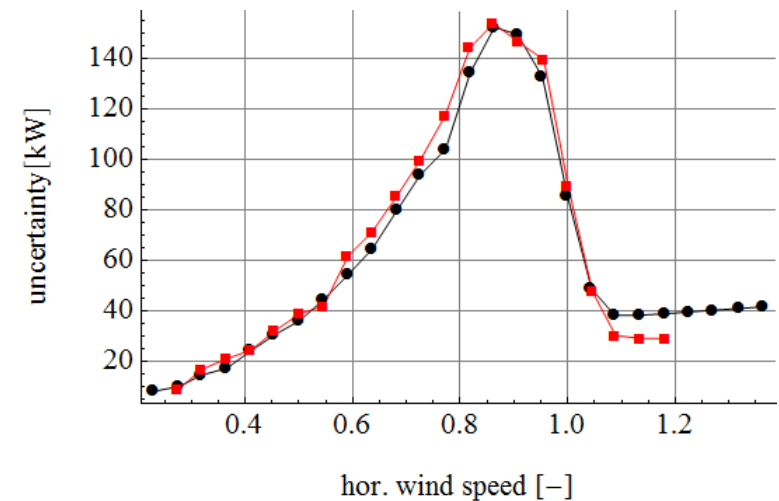

	Mast top cup	Lidar
AEP for 8m/s	100%	99.4%

Very similar power curves and slightly higher uncertainty.

## Summary nacelle mounted lidar

---

- Very **promising technology** for power curve verification, especially offshore.
- Nacelle lidar mean horizontal wind speed compares very well with the cup anemometer in front of the rotor.
- Challenges: measurement height uncertainty and calibration

### **DTU developed:**

- Procedure to measure a power curve with a two-beam nacelle lidar  
(Wagner et al., **DTU Wind Energy E-0016**, 2013)
- Methods to calibrate a two-beam nacelle lidar  
(M. Courtney, **DTU Wind Energy E-0020** , 2013)

### **IEA Task 32** about lidars (2012-2015)

- WP 3.3 Power curve measurement with nacelle mounted lidars
- WP 1.3 Calibration of nacelle lidars

# Thank you for your attention

rozn@dtu.dk

